


TRIMBLE SPS855 GNSS MODULAR RECEIVER

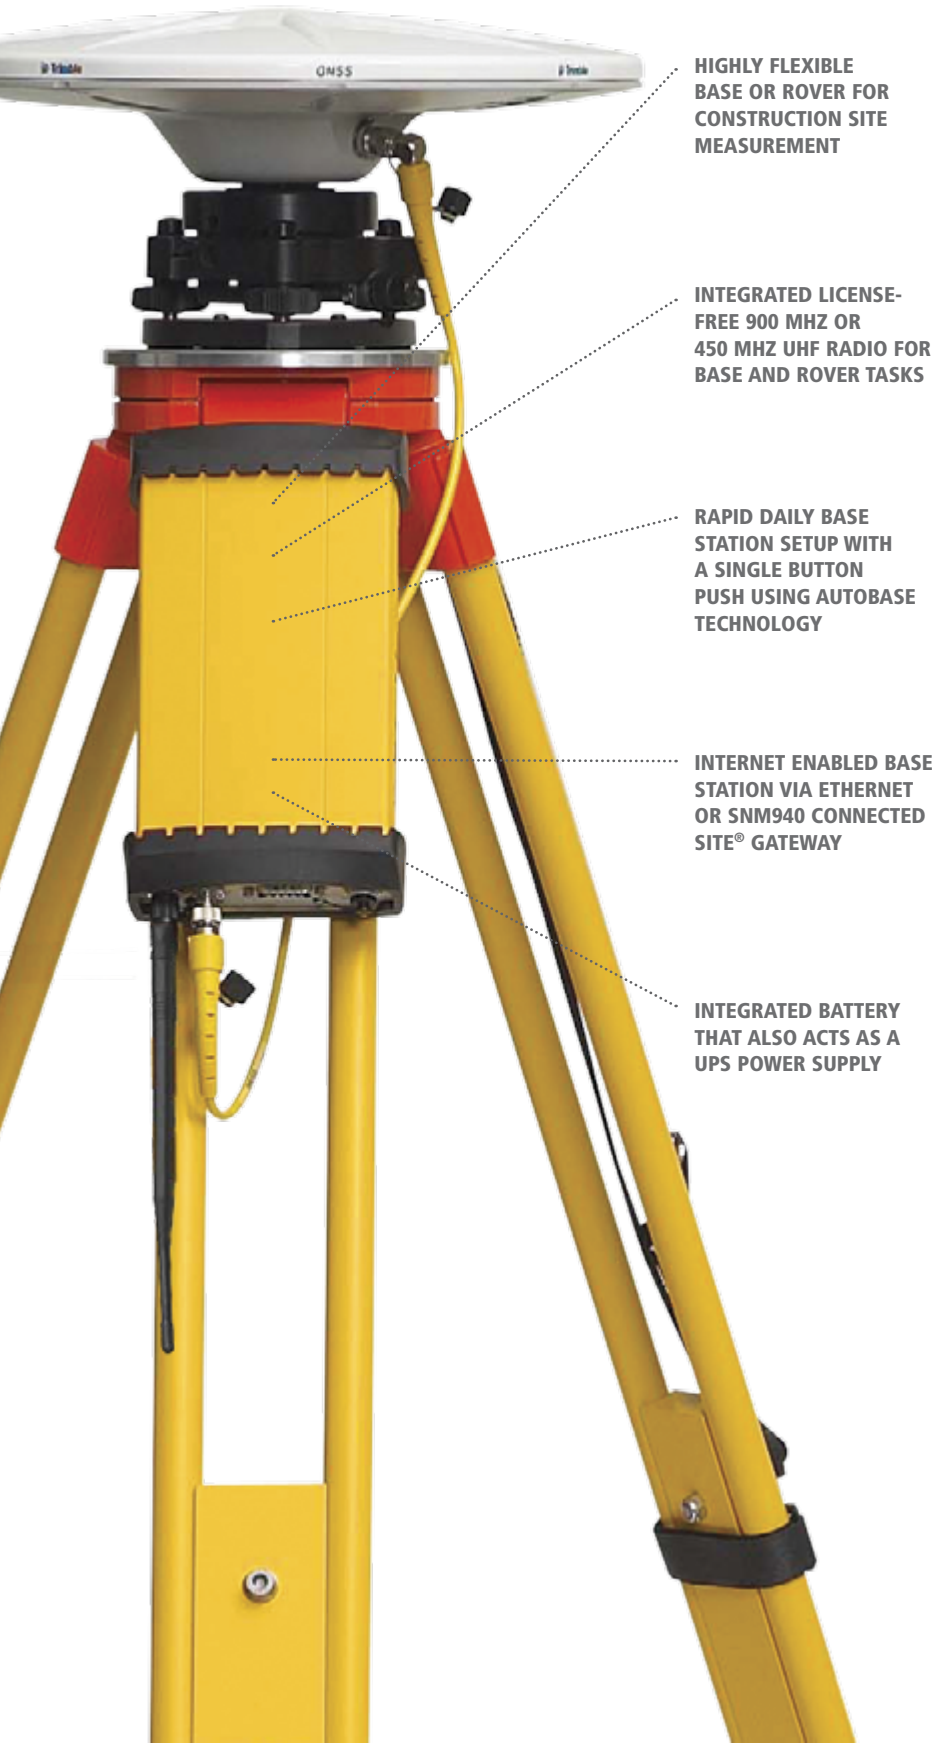

**HIGHLY FLEXIBLE
BASE OR ROVER FOR
CONSTRUCTION SITE
MEASUREMENT**

**INTEGRATED LICENSE-
FREE 900 MHZ OR
450 MHZ UHF RADIO FOR
BASE AND ROVER TASKS**

**RAPID DAILY BASE
STATION SETUP WITH
A SINGLE BUTTON
PUSH USING AUTOBASE
TECHNOLOGY**

**INTERNET ENABLED BASE
STATION VIA ETHERNET
OR SNM940 CONNECTED
SITE® GATEWAY**

**INTEGRATED BATTERY
THAT ALSO ACTS AS A
UPS POWER SUPPLY**

FLEXIBLE RECEIVER FOR JOBSITE MEASUREMENT

Whether you need a reliable GNSS base station or a rugged rover, the Trimble® SPS855 GNSS Modular Receiver gives you the flexibility to perform all of your construction site measurements. As a permanent or semi-permanent base station, it provides GNSS corrections for site measurements and machine control. As a rover, it can move easily from a site supervisor truck to a pole mount for grade checking, site measurement and stakeout.

The versatile SPS855 receiver is available in a range of options to suit your jobsite or marine construction performance requirements. Simply purchase the receiver that you need today, and upgrade as your needs change.

Secure and Easy to Use

The Trimble SPS855 is comprised of an integrated GNSS receiver and radio plus a choice of external antenna. The receiver can be placed in a secure environment such as the job trailer or boat cabin where it is protected from theft and weather. The less expensive antenna can be placed in a location with clear visibility to the sky and maximum radio coverage.

You don't have to be a GNSS expert to use the SPS855. Integrated 450 or 900 MHz license-free radio and interface with Trimble SCS900 Site Controller Software make the SPS855 easy to use, fast to setup and more productive on the job. Trimble Autobase™ technology means anyone on the jobsite can perform daily base station set up with one button push.

For more advanced troubleshooting, the receiver's web interface allows your GNSS manager to remotely monitor base station performance, availability, and configuration. No need for time-consuming and costly visits to the base station to set up each day or diagnose issues that may arise.

The fully upgradable SPS855 GNSS Modular Receiver can be configured in a variety of ways. For example:

- As a base station only
- As a rover only with SBAS, Location, or Precision Real-Time Kinematic (RTK) accuracy
- As a flexible base or rover with Precision RTK accuracy

The SPS855 can be combined with the Trimble SPS555H Heading Add-on Receiver, for applications on cranes, construction vessels, and dredges where real-time position and orientation are important.



TRIMBLE SPS855 GNSS MODULAR RECEIVER

GENERAL

Keyboard and display Vacuum fluorescent display 16 characters by 2 rows
 Dimmable. On/Off key for one-button startup
 Dimensions (L x W x D) 24 cm x 12 cm x 5 cm (9.4 in x 4.7 in x 1.9 in)
 Weight 1.65 kg (3.64 lb) receiver with internal battery and radio
 1.55 kg (3.42 lb) receiver with internal battery and no radio

ANTENNA OPTIONS

GA530 L1/L2/L2C GPS, SBAS, and OmniSTAR
 GA810 GPS, Glonass, OmniSTAR, SBAS, Galileo (optimized for OmniSTAR)
 Zephyr™ 2 Models L1/L2/L2C/L5 GPS, Glonass, OmniSTAR, SBAS, Galileo, BeiDou

ENVIRONMENTAL

Operating¹ -40 °C to +65 °C (-40 °F to +149 °F)
 Storage -40 °C to +80 °C (-40 °F to +176 °F)
 Humidity MIL-STD 810F, Method 507.4
 Waterproof IP67 for submersion to depth of 1 m (3.3 ft), dustproof
 Pole drop Designed to survive a 1 m (3.3 ft) pole drop onto a hard surface

MEASUREMENTS²

- 440-channel L1C/A, L1/L2/L2C GPS and QZSS. Upgradable to L5 and GLONASS L1/L2C/A, L1/L2P Full Cycle Carrier
- Galileo
- BeiDou
- OmniSTAR
- Trimble EVEREST™ multipath signal rejection
- 4-channel SBAS (WAAS/EGNOS/MSAS/QZSS)

CODE DIFFERENTIAL GPS POSITIONING³

Horizontal accuracy 0.25 m + 1 ppm RMS (0.8 ft + 1 ppm RMS)
 Vertical accuracy 0.50 m + 1 ppm RMS (1.6 ft + 1 ppm RMS)

REAL-TIME KINEMATIC (RTK UP TO 30 KM) POSITIONING³

Horizontal accuracy 8 mm + 1 ppm RMS (0.026 ft + 1 ppm RMS)
 Vertical accuracy 15 mm + 1 ppm RMS (0.05 ft + 1 ppm RMS)

TRIMBLE XFILE

Horizontal accuracy RTK⁴ + 10mm/minute RMS
 Vertical accuracy RTK + 20mm/minute RMS

INITIALIZATION TIME

Initialization reliability⁵ >99.9%

POWER

Internal Integrated internal battery 7.2 V, 7800 mA-hr, Lithium-ion
 External Power input on 7-pin 0-shell Lemo connector is optimized for lead acid batteries with a cut-off threshold of 11.5 V
 Power input on the 26-pin D-sub connector is optimized for Trimble Lithium-ion battery input with a cut-off threshold of 10.5 V
 Power consumption 6.0 W in rover mode with internal receive radio
 8.0 W in base mode with internal transmit radio

OPERATION TIME ON INTERNAL BATTERY

Rover 13 hours; varies with temperature
 Base station
 450 MHz systems Approximately 11 hours; varies with temperature⁶
 900 MHz systems Approximately 9 hours; varies with temperature

REGULATORY APPROVALS

- FCC: Part 15 Subpart B (Class B Device) and Subpart C, Part 90
- Canadian ICES-003. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.
- Canadian RSS-310, RSS-210, and RSS-119.
- Cet appareil est conforme à la norme CNR-310, CNR-210, et CNR-119 du Canada.
- ACMA: AS/NZS 4295 approval
- CE mark compliance
- C-tick mark compliance
- UN ST/SG/AC.10.11/Rev. 3, Amend. 1 (Lithium-ion Battery)
- UN ST/SG/AC. 10/27/Add. 2 (Lithium-ion Battery)
- RoHS compliant
- WEEE compliant

COMMUNICATIONS

Lemo (Serial) 7-pin 05 Lemo, Serial 1, 3-wire RS-232
 Modem 1 (Serial) 26-pin D-sub, Serial 2, Full 9-wire RS232, using adaptor cable
 Modem 2 (Serial) 26-pin D-sub, Serial 3, 3 wire RS-232, using adaptor cable
 1PPS (1 Pulse-per-second) Available on Marine versions
 Ethernet Through a multi-port adaptor
 Bluetooth wireless technology Fully-integrated, fully-sealed 2.4 GHz Bluetooth module⁷
 Integrated radios (optional) Fully-integrated, fully-sealed internal 450 MHz (UHF) Tx/Rx; Internal 900 MHz Tx/Rx
 External GSM/GPRS, cell phone support For Internet-based correction streams

Receiver position update rate 1 Hz, 2 Hz, 5 Hz, 10 Hz, and 20 Hz positioning
 Correction data input/output CMR™, CMR+™, CMRx™, RTCM v 2.x & 3.x
 Data outputs NMEA, GSOFF, 1PPS Time Tags (Marine version)

1 Receiver will operate normally to -40 °C. Internal batteries are rated to -20 °C.
 2 The Trimble SPS855 GNSS Modular Receiver is capable of supporting existing and planned GNSS satellite signals, including GPS, GLONASS, Galileo, Quasi Zenith Satellite System and BeiDou, and existing and planned augmentations to these GNSS systems. Support for the Galileo system is developed under a license of the European Union and the European Space Agency.
 3 Accuracy and reliability may be subject to anomalies such as multipath, obstructions, satellite geometry, and atmospheric conditions. Always follow recommended practices.
 4 RTK refers to the last reported precision before the correction source was lost and xFile started.
 5 May be affected by atmospheric conditions, signal multipath, and satellite geometry. Initialization reliability is continuously monitored to ensure highest quality.
 6 For receivers with the 2.0W upgrade, reduced battery performance should be expected compared to the 0.5W solution.
 7 Bluetooth type approvals are country specific. For more information, contact your local Trimble office or representative.

Specifications subject to change without notice.

© 2012-2013, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo and Connected Site are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. Autobase, CMR, CMRx, CMR+, EVEREST, Maxwell, xFile, VRS, Zephyr, and Zephyr Geodetic are trademarks of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. All other trademarks are the property of their respective owners.
 PN 022482-2508A (05/13)



YOUR SITECH HEAVY CIVIL CONSTRUCTION TECHNOLOGY PROVIDER

NORTH AMERICA

Trimble Heavy Civil Construction Division
 10368 Westmoor Drive
 Westminster, Colorado 80021
 USA
 800-361-1249 (Toll Free)
 +1-937-245-5154 Phone
 +1-937-233-9441 Fax
 www.trimble.com

EUROPE

Trimble Germany GmbH
 Am Prime Parc 11
 65479 Raunheim
 GERMANY
 +49-6142-2100-0 Phone
 +49-6142-2100-550 Fax

ASIA-PACIFIC

Trimble Navigation
 Singapore PTE Ltd.
 80 Marine Parade Road
 #22-06, Parkway Parade
 Singapore, 449269
 SINGAPORE
 +65 6348 2212 Phone
 +65 6348 2232 Fax



www.trimble.com