


John F Hunt

SKYJACK™



CE MODEL | SJ 9241 SJ 9250

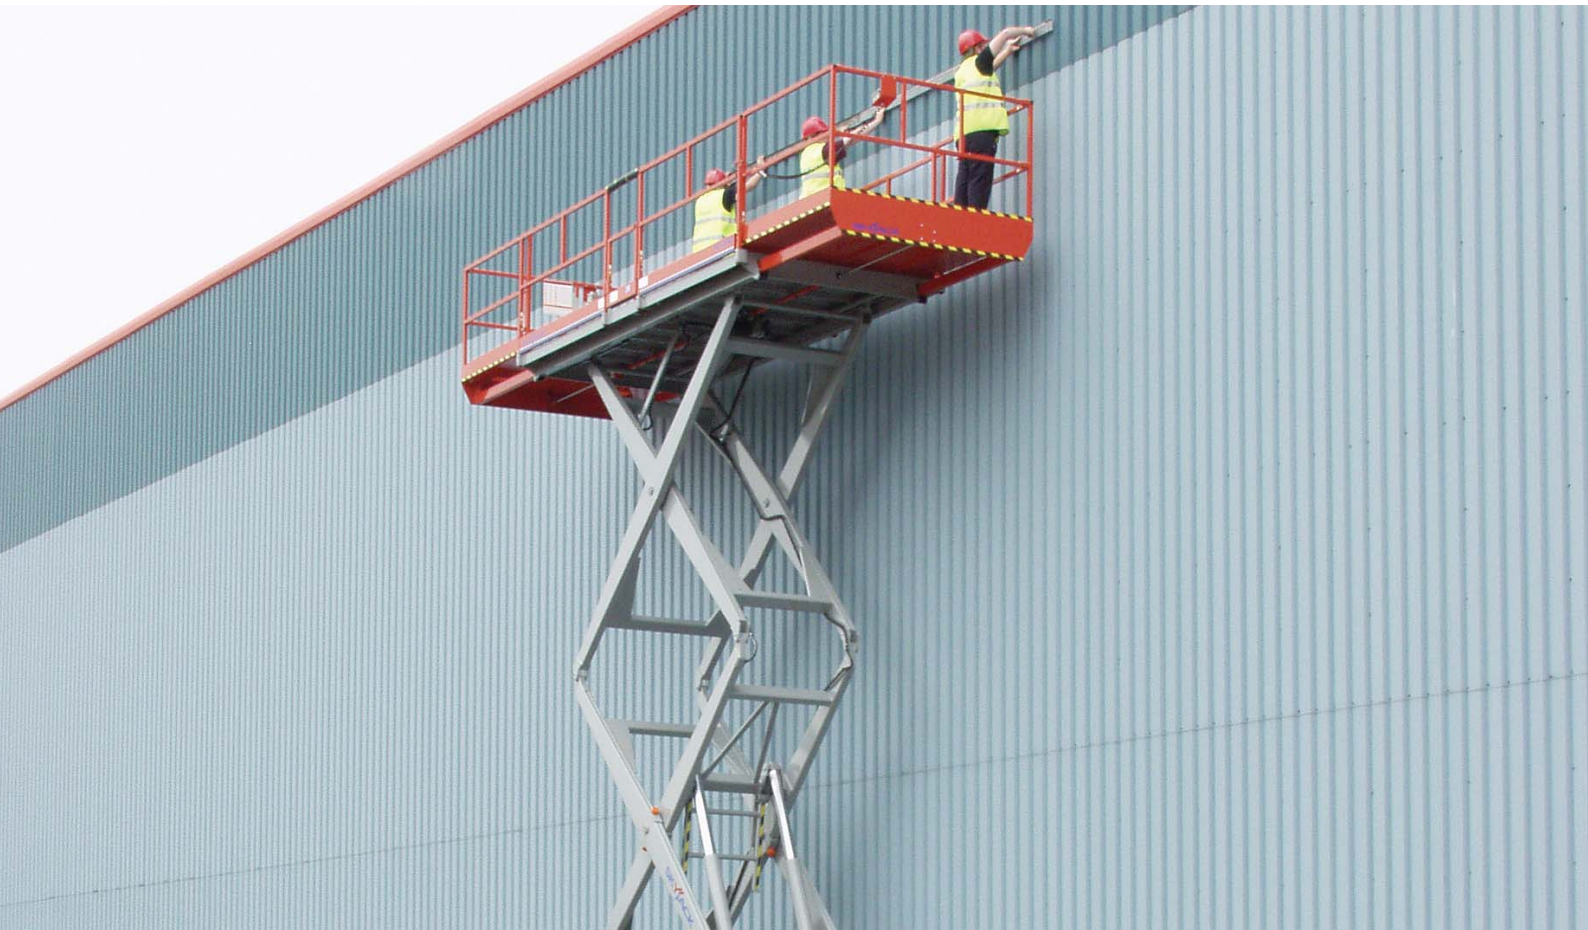


FULL-SIZE SERIES Rough Terrain SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities — all in one package!

Both the SJ 9241 and SJ 9250 feature an expansive platform, up to 7,2 m in length, when both 1,5 m powered extension decks are extended. With working heights up to 17,2 m and standard independent/auto leveling outriggers, these units can meet the needs of even the most challenging job sites.

An easily accessible Kubota diesel engine powers a robust axle based 4WD system with "no-spin" and limited slip differentials, delivering excellent job site terrainability.


As with every Skyjack model, these units use an analog based control system, featuring Skyjack's standard colour coded and numbered wiring, for ease of troubleshooting.

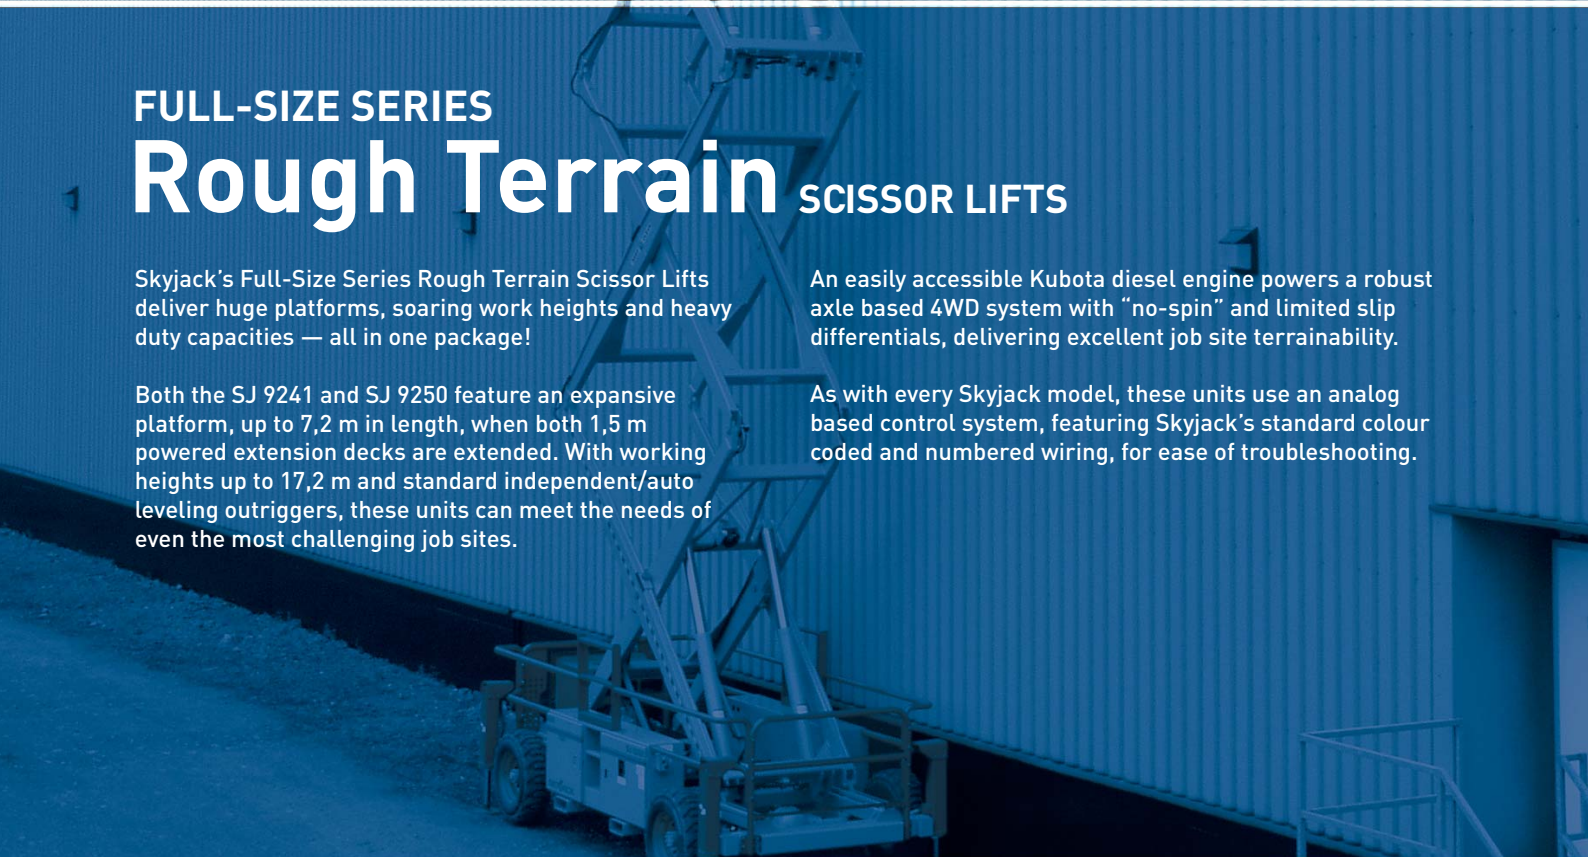

FULL-SIZE SERIES

Rough Terrain Scissor Lifts

Specifications	SJ 9241	SJ 9250
A Work Height	14,5 m	17,2 m
B Raised Platform Height	12,5 m	15,2 m
C Lowered Platform Height	1,7 m	2,0 m
D Overall Width	2,3 m	2,3 m
E Overall Length	4,5 m	4,5 m
F Stowed Height (Rails Up)	2,8 m	3,2 m
G Stowed Height (Rails Down)	2,0 m	2,3 m
H Platform Width (Inside Dimension)	1,9 m	1,9 m
I Platform Length (Inside Dimension)	7,2 m	7,2 m
Ground Clearance	0,2 m	0,2 m
Wheelbase	3,0 m	3,0 m
Weight	6715 kg	7407 kg
Gradeability	30%	30%
Turning Radius (Inside)	4,4 m	4,4 m
Turning Radius (Outside)	7,2 m	7,2 m
Lift Time (With Rated Load)	62 sec	64 sec
Drive Speed (Stowed)	3,8 km/h	3,8 km/h
Drive Speed (Raised)	0,72 km/h	0,72 km/h
Maximum Drive Height	Full Height	7,9 m
Capacity (Overall)	681 kg	681 kg
Maximum # of Persons	5	5

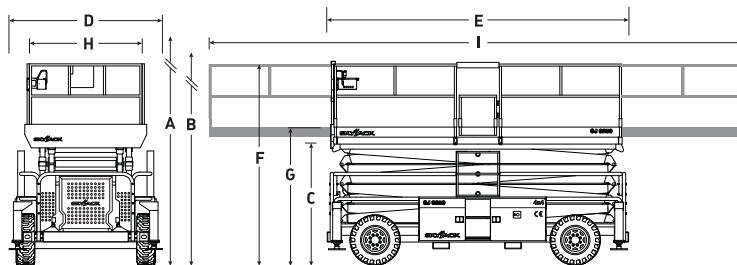

Model	Capacity With 2 Extension Decks		
	Main	Front Ext.	Rear Ext.
SJ 9241	227 kg	227 kg	227 kg
SJ 9250	227 kg	227 kg	227 kg

STANDARD FEATURES

- Axle based 4WD
- “No Spin” rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota diesel engine on roll out tray
- Self centering scissor design
- Dual powered extension decks (1,5 m front and rear)
- Large 7,2 m total working platform length
- Independent/auto leveling outriggers
- Analog control system
- Colour coded and numbered wiring system
- 30% gradeability
- Foam-filled tyres
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Lowering warning system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Scissor guards
- Lanyard attachment points
- Tie down/lift lugs

OPTIONS‡

- Diesel engine with scrubber
- All motion audible alarm
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

‡Capacities, and machine weights may differ when options are added

Skyjack UK

Unit 1, Maes-y-Clawdd
 Maesbury Road Industrial Estate
 Oswestry, Shropshire, SY10 8NN
 Phone: +44-1691-676235
 Fax: +44-1691-676239
 Email: info@skyjackeurope.co.uk

www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to the Machinery Directive 98/37/EC.